

General Description


These N-Channel enhancement mode power field effect transistors are using trench DMOS technology. This advanced technology has been especially tailored to minimize on-state resistance, provide superior switching performance, and withstand high energy pulse in the avalanche and commutation mode. These devices are well suited for high efficiency fast switching applications.

BVDSS	RDS(ON)	ID
30V	36mΩ	6A

Features

- 30V, 6A, $R_{DS(ON)} = 36m\Omega @ V_{GS} = 10V$
- Improved dv/dt capability
- Fast switching
- Green Device Available

DFN2x2-6L 2EP Pin Configuration

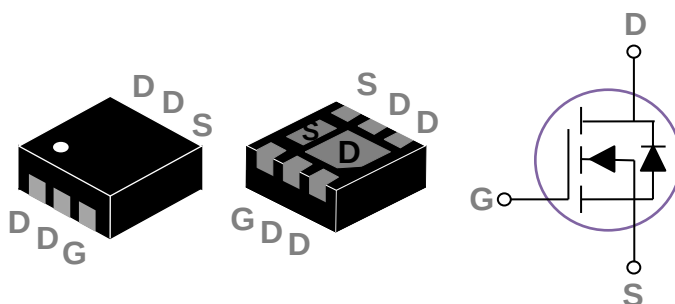

Applications

- MB / VGA / Vcore
- Load Switch
- Hand-Held Instrument

Absolute Maximum Ratings $T_c=25^\circ\text{C}$ unless otherwise noted

Symbol	Parameter	Rating	Units
V_{DS}	Drain-Source Voltage	30	V
V_{GS}	Gate-Source Voltage	± 12	V
I_D	Drain Current – Continuous ($T_A=25^\circ\text{C}$)	6	A
	Drain Current – Continuous ($T_A=70^\circ\text{C}$)	4.8	A
I_{DM}	Drain Current – Pulsed ²	24	A
P_D	Power Dissipation ($T_A=25^\circ\text{C}$)	2.02	W
	Power Dissipation – Derate above 25°C	16.1	mW/ $^\circ\text{C}$
T_{STG}	Storage Temperature Range	-55 to 150	$^\circ\text{C}$
T_J	Operating Junction Temperature Range	-55 to 150	$^\circ\text{C}$

Thermal Characteristics

Symbol	Parameter	Typ.	Max.	Unit
$R_{\theta JA}$	Thermal Resistance Junction to ambient	---	62	$^\circ\text{C/W}$

Electrical Characteristics ($T_J=25^\circ\text{C}$, unless otherwise noted)
Off Characteristics

Symbol	Parameter	Conditions	Min.	Typ.	Max.	Unit
BV_{DSS}	Drain-Source Breakdown Voltage	$V_{GS}=0V$, $I_D=250\mu A$	30	---	---	V
I_{DSS}	Drain-Source Leakage Current	$V_{DS}=30V$, $V_{GS}=0V$, $T_J=25^\circ\text{C}$	---	---	1	μA
		$V_{DS}=24V$, $V_{GS}=0V$, $T_J=100^\circ\text{C}$	---	---	10	μA
I_{GSS}	Gate-Source Leakage Current	$V_{GS}=\pm 12V$, $V_{DS}=0V$	---	---	± 100	nA

On Characteristics

$R_{DS(ON)}$	Static Drain-Source On-Resistance	$V_{GS}=10V$, $I_D=2A$	---	30	36	m Ω
		$V_{GS}=4.5V$, $I_D=1A$	---	36	44	m Ω
		$V_{GS}=2.5V$, $I_D=0.8A$	---	54	70	m Ω
$V_{GS(th)}$	Gate Threshold Voltage	$V_{GS}=V_{DS}$, $I_D=250\mu A$	0.5	0.8	1.2	V

Dynamic and switching Characteristics

Q_g	Total Gate Charge ^{1, 2}	$V_{DS}=15V$, $V_{GS}=10V$, $I_D=3A$	---	3.5	6	nC
Q_{gs}	Gate-Source Charge ^{1, 2}		---	0.1	0.2	
Q_{gd}	Gate-Drain Charge ^{1, 2}		---	1	1.5	
$T_{d(on)}$	Turn-On Delay Time ^{1, 2}	$V_{DS}=15V$, $V_{GS}=10V$, $R_G=6\Omega$ $I_D=3A$	---	6	9	ns
T_r	Rise Time ^{1, 2}		---	9	13	
$T_{d(off)}$	Turn-Off Delay Time ^{1, 2}		---	33	50	
T_f	Fall Time ^{1, 2}		---	4	6	
C_{iss}	Input Capacitance	$V_{DS}=15V$, $V_{GS}=0V$, $F=1\text{MHz}$	---	240	360	pF
C_{oss}	Output Capacitance		---	40	60	
C_{rss}	Reverse Transfer Capacitance		---	30	45	
R_g	Gate resistance	$V_{GS}=0V$, $V_{DS}=0V$, $F=1\text{MHz}$	---	1	---	Ω

Drain-Source Diode Characteristics and Maximum Ratings

Symbol	Parameter	Conditions	Min.	Typ.	Max.	Unit
I_S	Continuous Source Current	$V_G=V_D=0V$, Force Current	---	---	6	A
I_{SM}	Pulsed Source Current		---	---	12	A
V_{SD}	Diode Forward Voltage	$V_{GS}=0V$, $I_S=1A$, $T_J=25^\circ\text{C}$	---	---	1	V
t_{rr}	Reverse Recovery Time	$V_R=30V$, $I_S=2.5A$	---	150	---	ns
Q_{rr}	Reverse Recovery Charge	$di/dt=100A/\mu s$, $T_J=25^\circ\text{C}$	---	270	---	nC

Note :

1. Repetitive Rating : Pulsed width limited by maximum junction temperature.
2. The data tested by pulsed , pulse width $\leq 300\mu s$, duty cycle $\leq 2\%$.
3. Essentially independent of operating temperature.

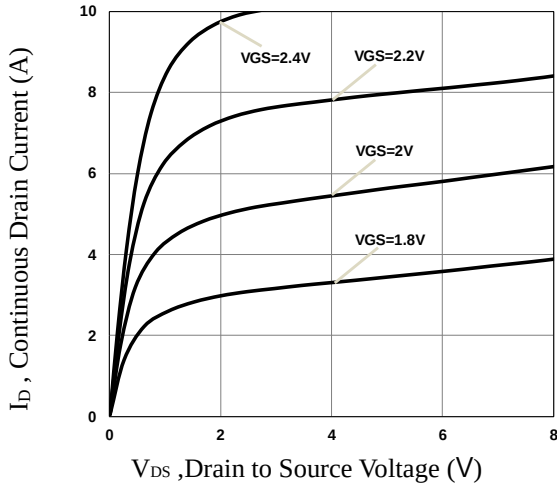


Fig.1 Typical Output Characteristics

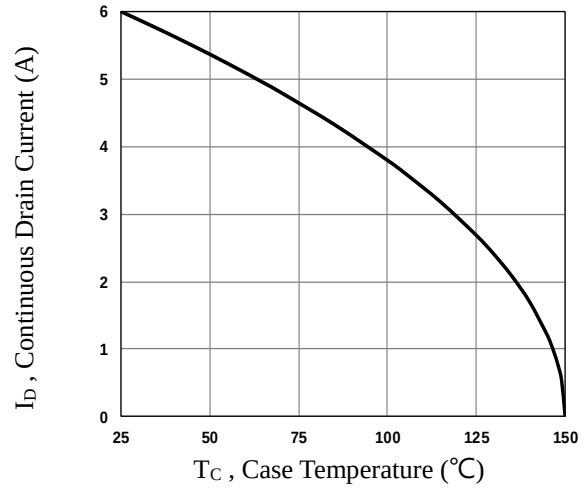


Fig.2 Continuous Drain Current vs. T_C

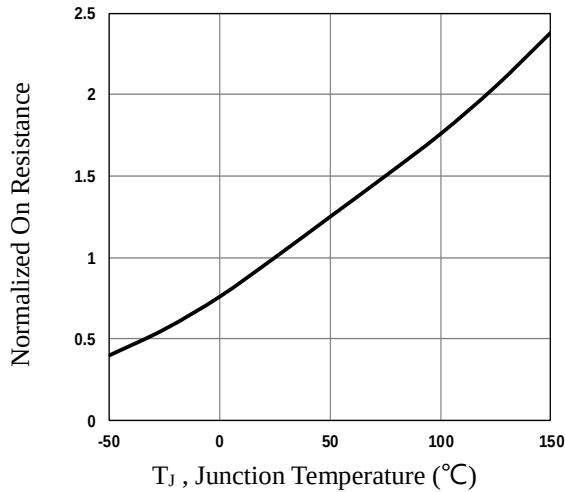


Fig.3 Normalized $R_{DS(on)}$ vs. T_J

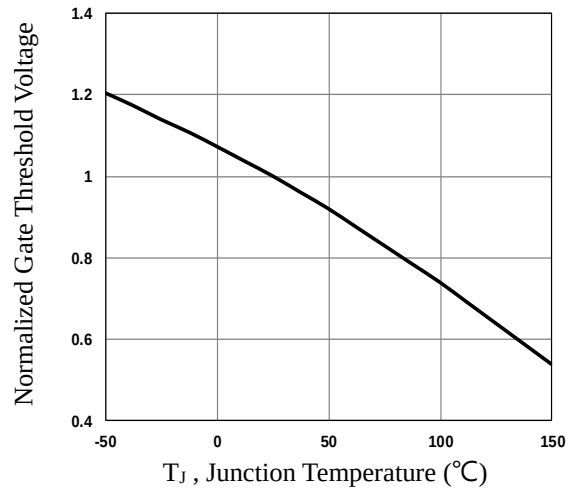


Fig.4 Normalized V_{th} vs. T_J

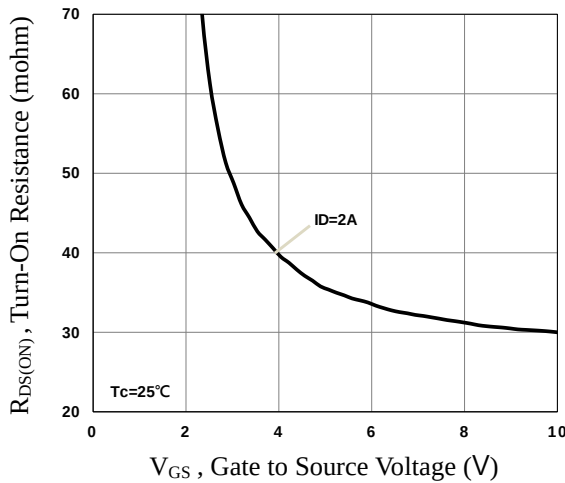


Fig.5 Turn-On Resistance vs. V_{GS}

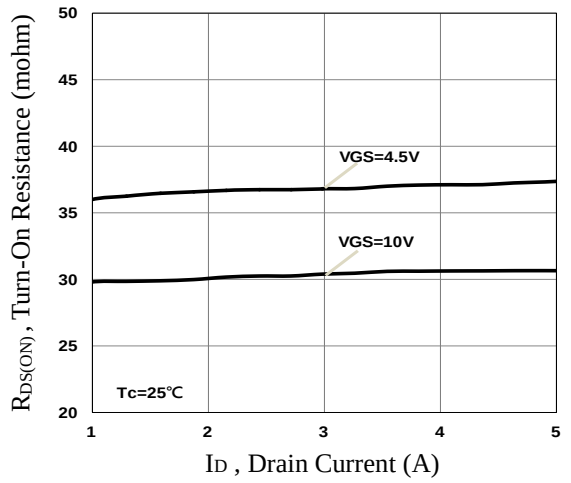


Fig.6 Turn-On Resistance vs. I_D

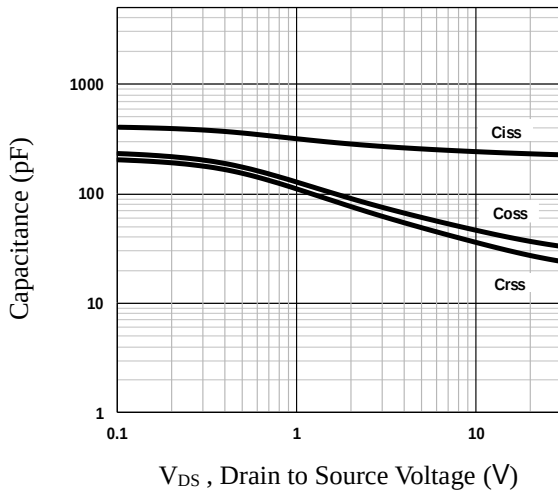


Fig.7 Capacitance Characteristics

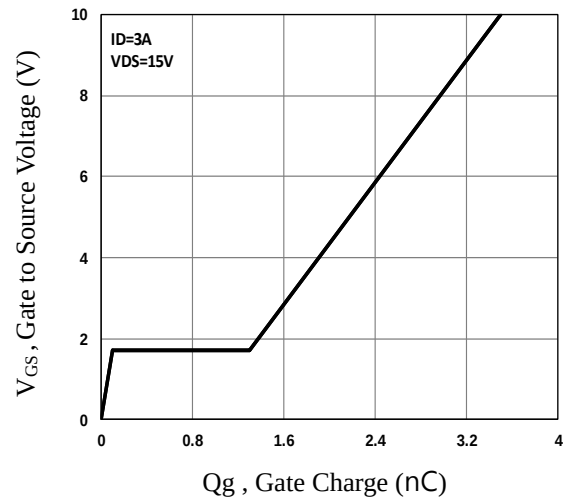


Fig.8 Gate Charge Characteristics

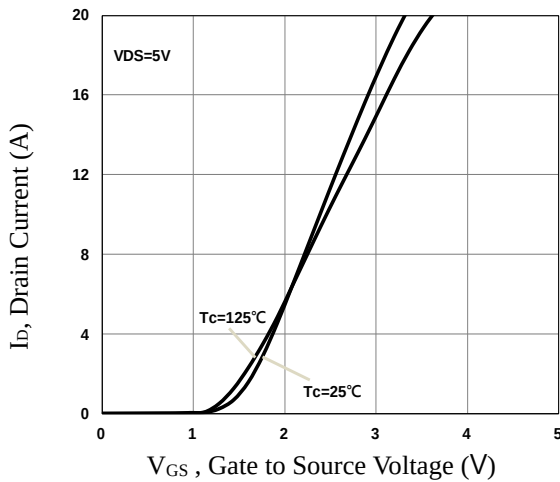


Fig.9 Transfer Characteristics

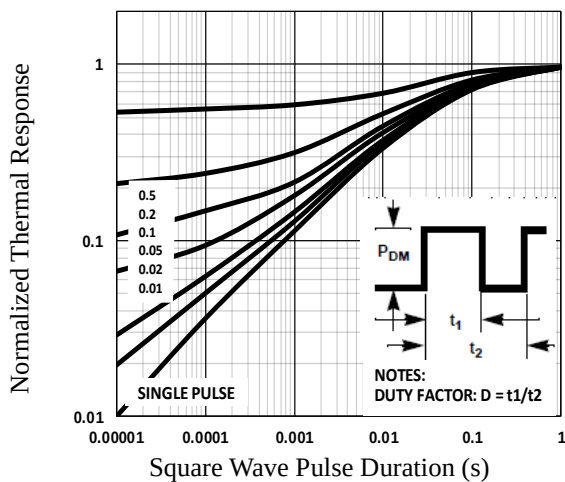


Fig.10 Normalized Transient Impedance


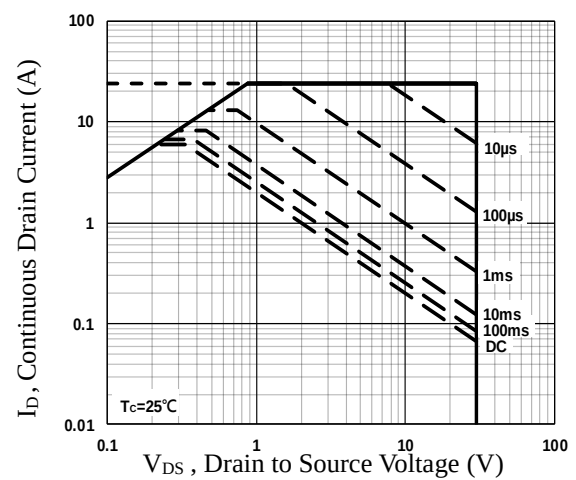


Fig.11 Maximum Safe Operation Area


DFN2x2-6L 2EP PACKAGE INFORMATION

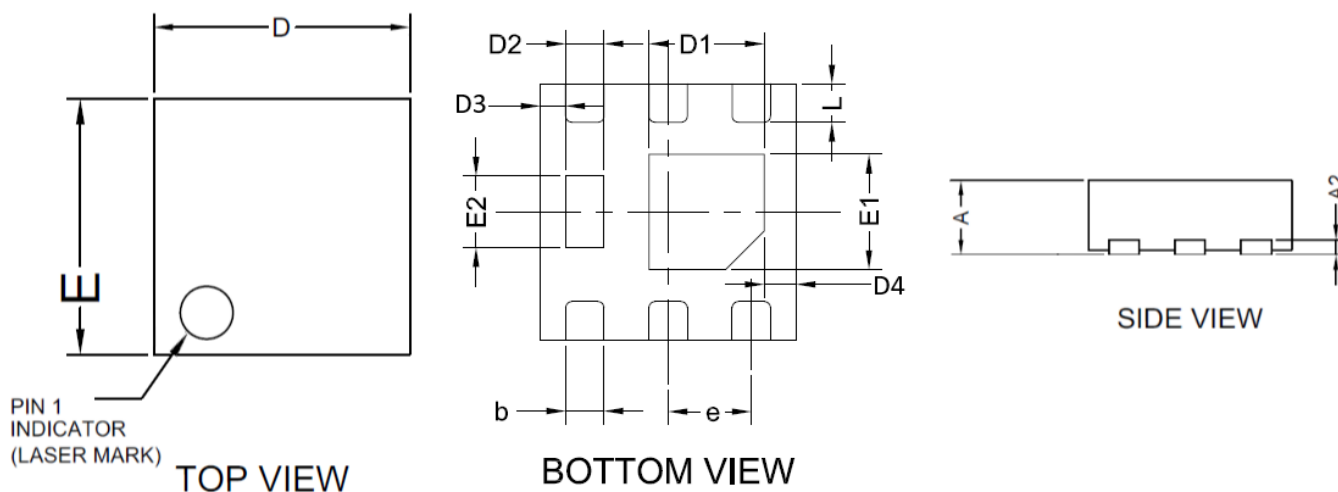

Symbol	Dimensions In Millimeters		Dimensions In Inches	
	MAX	MIN	MAX	MIN
A	0.800	0.500	0.031	0.019
A2	0.250	0.145	0.010	0.006
b	0.350	0.250	0.014	0.010
D	2.100	1.900	0.083	0.075
D1	1.050	0.800	0.041	0.031
D2	0.430	0.250	0.017	0.010
D3	0.200BSC		0.008BSC	
D4	0.200BSC		0.008BSC	
E	2.100	1.900	0.083	0.075
E1	1.250	0.800	0.049	0.031
E2	0.750	0.460	0.029	0.018
e	0.650BSC		0.026BSC	
L	0.350	0.225	0.014	0.009

RECOMMENDED LAND PATTERN

DFN2X2-6L 2EP

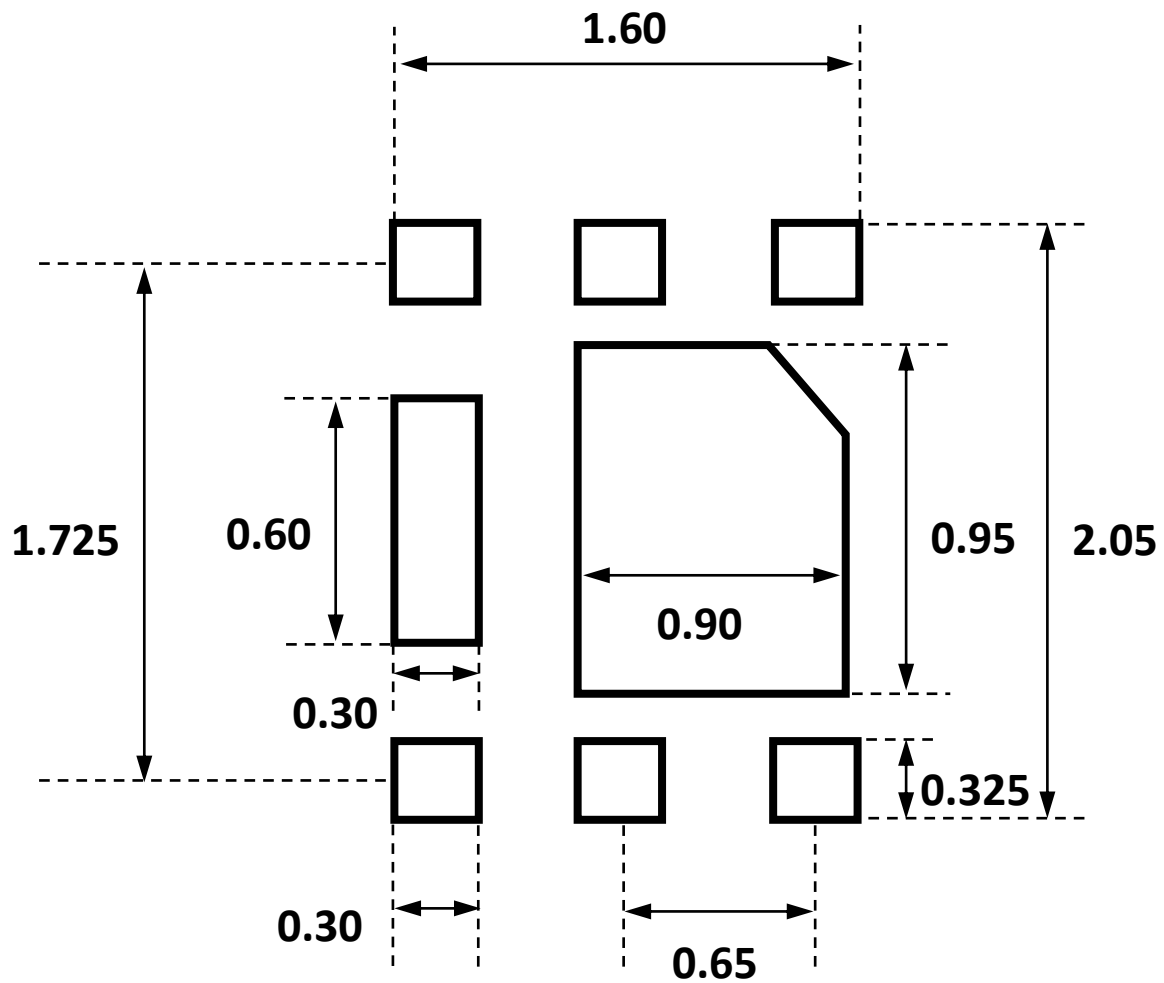

unit : mm