

General Description


These N-Channel enhancement mode power field effect transistors are using silicon carbide technology. This advanced technology has been especially tailored to minimize on-state resistance, provide superior switching performance, and withstand high energy pulse in the avalanche and commutation mode. These devices are well suited for high efficiency fast switching applications.

BVDSS	R _{DS(ON)(typ)}	ID
1200V	20mΩ	80A

Features

- 1200V,80A, R_{DS(ON)(typ)} =20mΩ@V_{GS} = 20V
- Improved dv/dt capability
- Fast switching
- Green Device Available

TO247-4L Pin Configuration

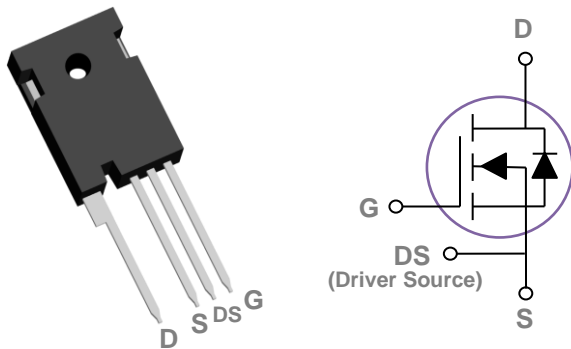

Applications

- SMPS
- Solar Inverters
- Renewable energy
- EV battery chargers

Absolute Maximum Ratings T_c=25°C unless otherwise noted

Symbol	Parameter	Rating	Units
V _{DS}	Drain-Source Voltage	1200	V
V _{GS(max)}	Gate-Source Voltage , max. static voltage	+25/-10	V
V _{GS(op)}	Recommended Drive Voltage	+18/-5	V
I _D	Drain Current – Continuous (T _c =25°C)	80	A
	Drain Current – Continuous (T _c =100°C)	56	A
I _{DM}	Drain Current – Pulsed ¹	200	A
P _D	Power Dissipation (T _c =25°C)	428	W
	Power Dissipation – Derate above 25°C	2.86	W/°C
T _{STG}	Storage Temperature Range	-55 to 175	°C
T _J	Operating Junction Temperature Range	-55 to 175	°C

Thermal Characteristics

Symbol	Parameter	Typ.	Max.	Unit
R _{θJC}	Thermal Resistance Junction to Case	0.35	---	°C/W

Electrical Characteristics (T_J=25 °C, unless otherwise noted)
Off Characteristics

Symbol	Parameter	Conditions	Min.	Typ.	Max.	Unit
BV _{DSS}	Drain-Source Breakdown Voltage	V _{GS} =0V , I _D =100μA	1200	---	---	V
I _{DSS}	Drain-Source Leakage Current	V _{DS} =1200V , V _{GS} =0V , T _J =25°C	---	---	10	μA
I _{GSS}	Gate-Source Leakage Current	V _{GS} =22V , V _{DS} =0V	---	---	100	nA

On Characteristics

R _{DS(ON)}	Static Drain-Source On-Resistance	V _{GS} =18V , I _D =50A	---	20	26	mΩ
R _{DS(ON)}	Static Drain-Source On-Resistance	V _{GS} =15V , I _D =50A	---	25	---	mΩ
V _{GS(th)}	Gate Threshold Voltage	V _{GS} =V _{DS} , I _D =20mA	2.0	2.8	4.0	V

Dynamic and switching Characteristics

Q _g	Total Gate Charge	V _{DS} =800V , V _{GS} =-5/18V , I _{DS} =50A	---	200	---	nC
Q _{gs}	Gate-Source Charge		---	35	---	
Q _{gd}	Gate-Drain Charge		---	52	---	
T _{d(on)}	Turn-On Delay Time	V _{DD} =800V , V _{GS} =-5/18V , R _G =6Ω , I _{DS} =50A	---	20	---	ns
T _r	Rise Time		---	30	---	
T _{d(off)}	Turn-Off Delay Time		---	35	---	
T _f	Fall Time		---	10	---	
C _{iss}	Input Capacitance	V _{DS} =1000V , V _{GS} =0V , F=500kHz , V _{AC} =25mV	---	4000	---	pF
C _{oss}	Output Capacitance		---	230	---	
C _{rss}	Reverse Transfer Capacitance		---	12	---	
R _g	Gate resistance	V _{GS} =0V , V _{DS} =0V , F=1MHz	---	0.6	---	Ω

Drain-Source Diode Characteristics and Maximum Ratings

Symbol	Parameter	Conditions	Min.	Typ.	Max.	Unit
I _S	Continuous Source Current	V _G =V _D =0V , Force Current	---	---	80	A
V _{SD}	Diode Forward Voltage	V _{GS} =-5V , I _S =33A , T _J =25°C	---	4.1	---	V
t _{rr}	Reverse Recovery Time	V _R =400V , I _S =50A	---	65	---	ns
Q _{rr}	Reverse Recovery Charge	di/dt=300A/μs , T _J =25°C	---	200	---	nC

Note :

1. Repetitive Rating : Pulsed width limited by maximum junction temperature.
2. The data tested by pulsed , pulse width ≤ 300μs , duty cycle ≤ 2%.

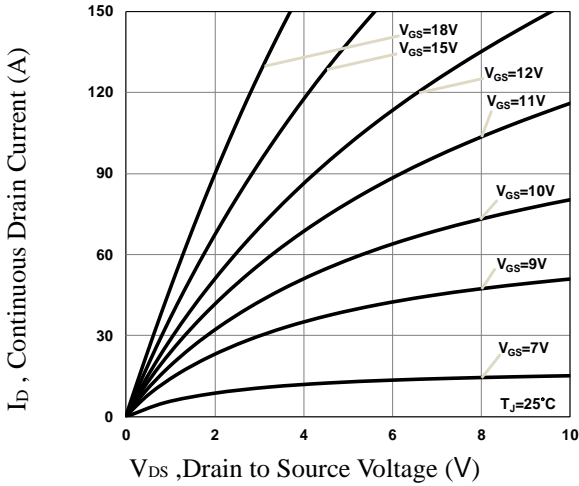


Fig.1 Typical Output Characteristics

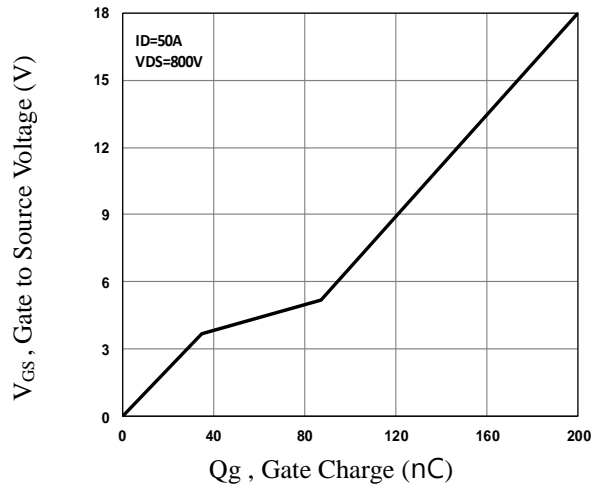


Fig.2 Gate Charge Characteristics

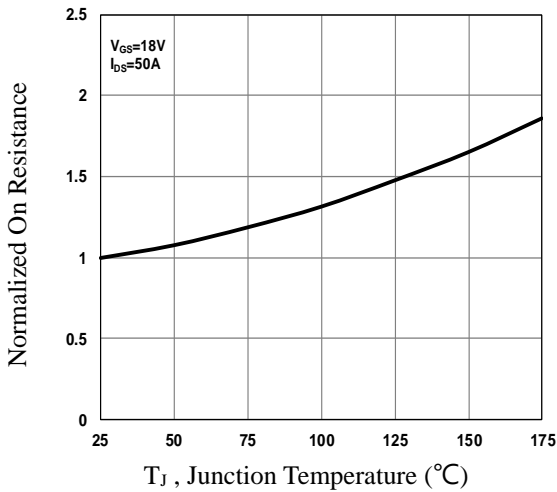


Fig.3 Normalized RDS(on) vs. TJ

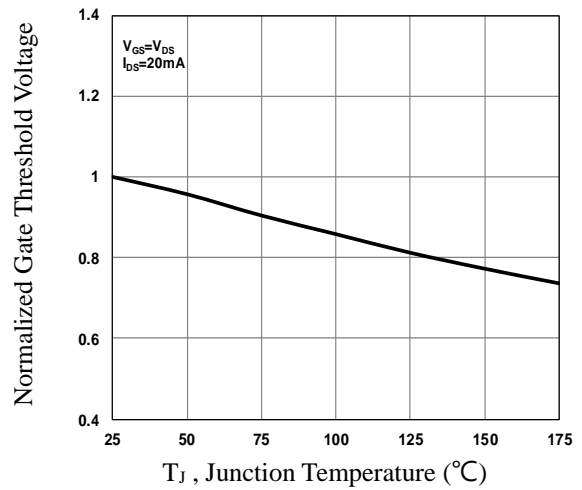


Fig.4 Normalized Vth vs. TJ

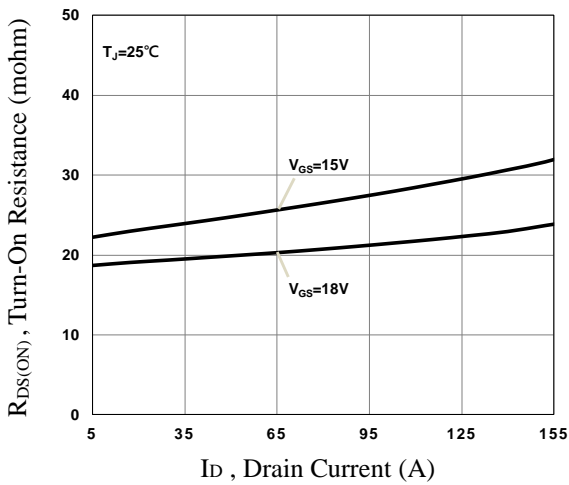


Fig.5 Turn-On Resistance vs. ID

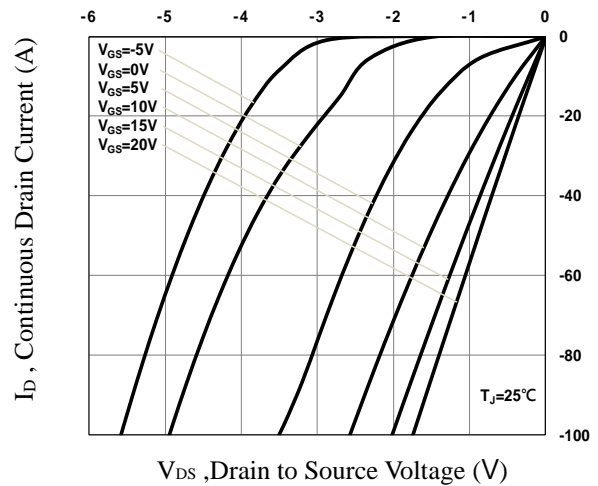


Fig.6 3rd Quadrant Characteristic

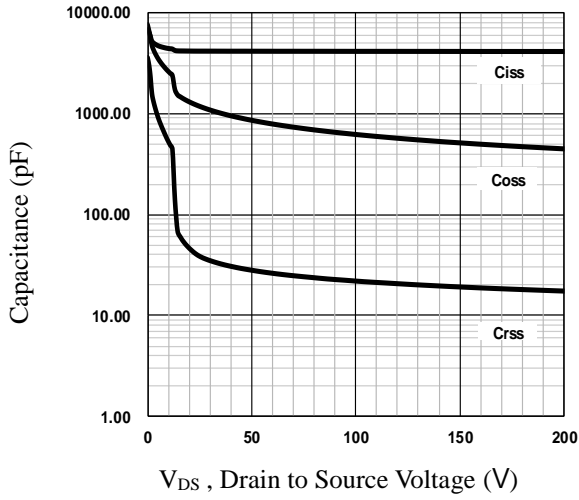


Fig.7 Capacitance Characteristics

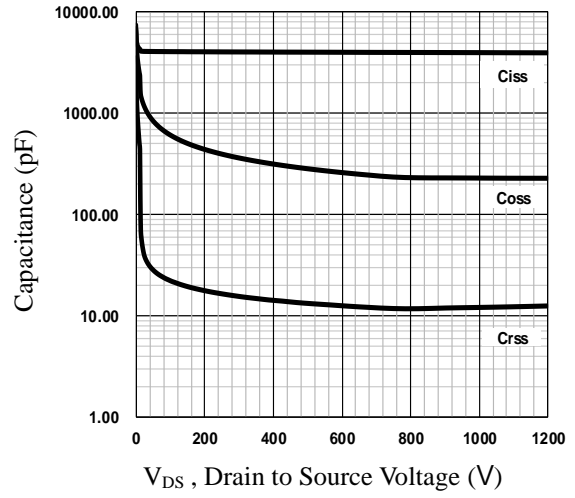


Fig.8 Capacitance Characteristics

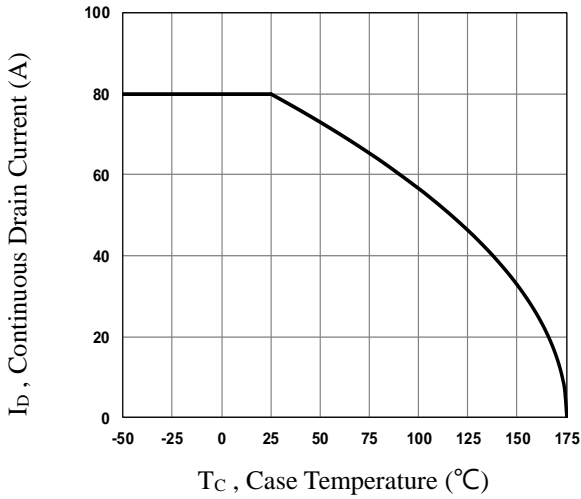


Fig.9 Continuous Drain Current vs. T_c


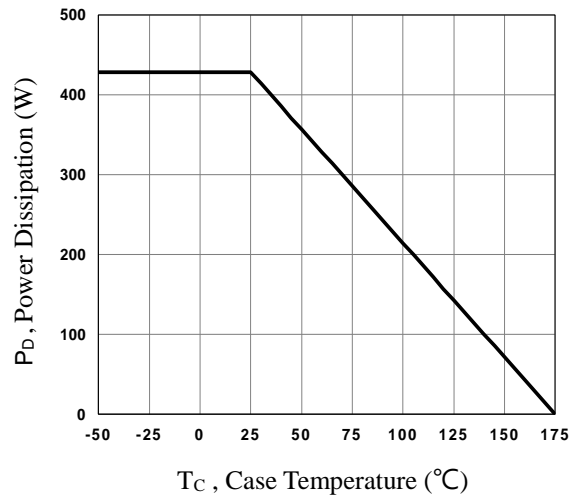


Fig.10 Power Dissipation Derating vs. T_c

TO247-4L PACKAGE INFORMATION

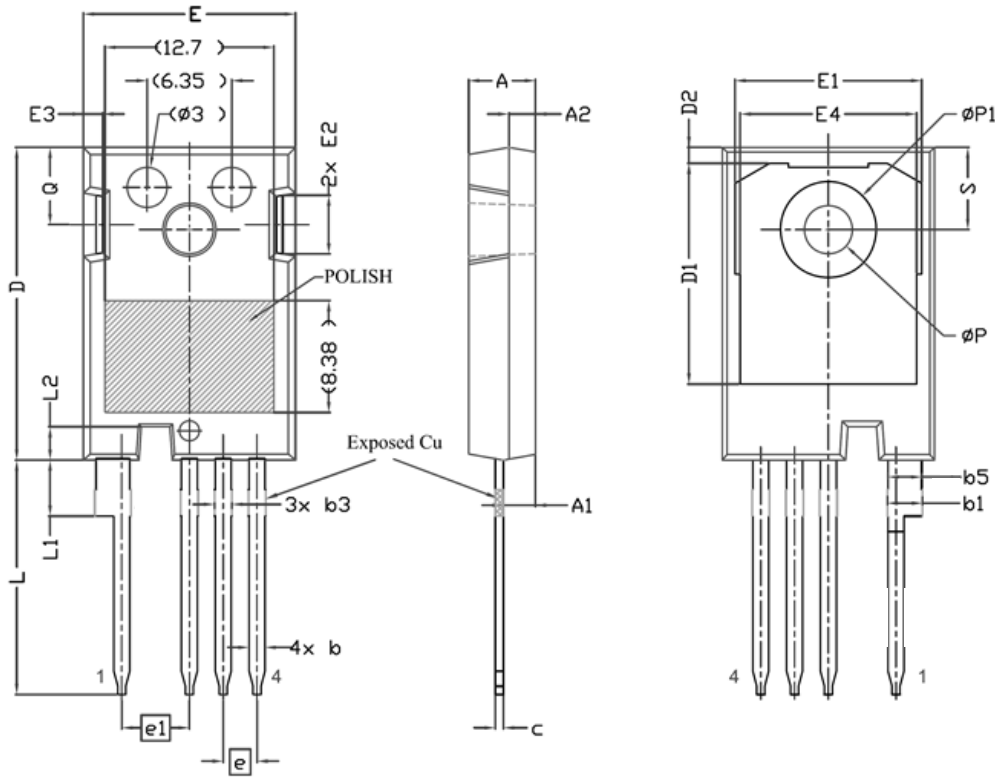

SYMBOL	mm		SYMBOL	mm	
	MIN	MAX		MIN	MAX
A	4.83	5.21	D2	0.95	1.25
A1	2.29	2.54	E	15.75	16.13
A2	1.91	2.16	E1	13.10	14.15
b'	1.07	1.28	E2	3.68	5.10
b	1.07	1.33	E3	1.00	1.90
b1	2.39	2.94	E4	12.38	13.43
b2	2.39	2.84	e	2.54 BSC	
b3	1.07	1.60	e1	5.08 BSC	
b4	1.07	1.50	L	17.31	17.82
b5	2.39	2.69	L1	3.97	4.37
b6	2.39	2.64	L2	2.35	2.65
c	0.55	0.68	ØP	3.51	3.65
c1	0.55	0.65	ØP1	7.19 REF.	
D	23.30	23.60	Q	5.49	6.00
D1	16.25	17.65	S	6.04	6.30