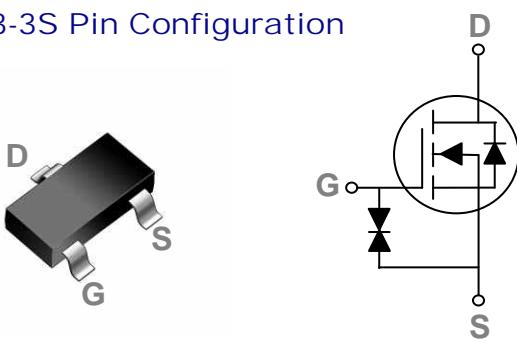


General Description

These N-Channel enhancement mode power field effect transistors are using trench DMOS technology. This advanced technology has been especially tailored to minimize on-state resistance, provide superior switching performance, and withstand high energy pulse in the avalanche and commutation mode. These devices are well suited for high efficiency fast switching applications.

SOT23-3S Pin Configuration



BVDSS	RDS(ON)	ID
60V	1.6Ω	0.3A

Features

- 60V,0.3A, $RDS(ON) = 1.6\Omega$ @ $VGS=10V$
- Improved dv/dt capability
- Fast switching
- 100% EAS Guaranteed
- Green Device Available
- G-S ESD Protection Diode Embedded

Applications

- Motor Drive
- Power Tools
- LED Lighting

Absolute Maximum Ratings $T_c=25^\circ C$ unless otherwise noted

Symbol	Parameter	Rating	Units
V_{DS}	Drain-Source Voltage	60	V
V_{GS}	Gate-Source Voltage	± 20	V
I_D	Drain Current – Continuous ($T_c=25^\circ C$)	0.3	A
	Drain Current – Continuous ($T_c=100^\circ C$)	0.2	A
I_{DM}	Drain Current – Pulsed ¹	1.2	A
P_D	Power Dissipation ($T_c=25^\circ C$)	0.35	W
	Power Dissipation – Derate above 25°C	0.003	W/°C
T_{STG}	Storage Temperature Range	-50 to 150	°C
T_J	Operating Junction Temperature Range	-50 to 150	°C

Thermal Characteristics

Symbol	Parameter	Typ.	Max.	Unit
$R_{\theta JA}$	Thermal Resistance Junction to ambient	---	357	°C/W



60V N-Channel MOSFETs

PMEN2N7002S

Electrical Characteristics ($T_J=25^\circ\text{C}$, unless otherwise noted)

Off Characteristics

Symbol	Parameter	Conditions	Min.	Typ.	Max.	Unit
BV_{DSS}	Drain-Source Breakdown Voltage	$V_{\text{GS}}=0\text{V}$, $I_D=250\mu\text{A}$	60	---	---	V
$\Delta \text{BV}_{\text{DSS}}/\Delta T_J$	BV_{DSS} Temperature Coefficient	Reference to 25°C , $I_D=1\text{mA}$	---	0.04	---	$\text{V}/^\circ\text{C}$
I_{DSS}	Drain-Source Leakage Current	$V_{\text{DS}}=60\text{V}$, $V_{\text{GS}}=0\text{V}$, $T_J=25^\circ\text{C}$	---	---	1	μA
		$V_{\text{DS}}=48\text{V}$, $V_{\text{GS}}=0\text{V}$, $T_J=125^\circ\text{C}$	---	---	100	μA
I_{GSS}	Gate-Source Leakage Current	$V_{\text{GS}}=\pm 20\text{V}$, $V_{\text{DS}}=0\text{V}$	---	---	± 10	μA

On Characteristics

$R_{\text{DS(ON)}}$	Static Drain-Source On-Resistance	$V_{\text{GS}}=10\text{V}$, $I_D=0.5\text{A}$	---	1.2	1.6	Ω
		$V_{\text{GS}}=4.5\text{V}$, $I_D=0.2\text{A}$	---	1.8	3	Ω
$V_{\text{GS(th)}}$	Gate Threshold Voltage	$V_{\text{GS}}=V_{\text{DS}}$, $I_D=250\mu\text{A}$	1	1.6	2.5	V
			---	-4	---	$\text{mV}/^\circ\text{C}$
g_{fs}	Forward Transconductance	$V_{\text{DS}}=10\text{V}$, $I_D=0.1\text{A}$	---	0.24	---	S

Dynamic and switching Characteristics

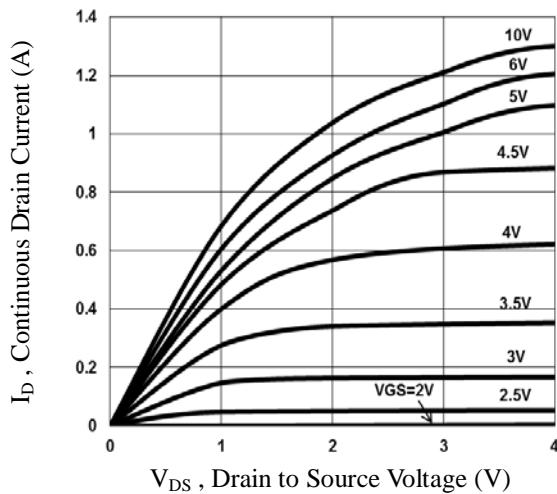
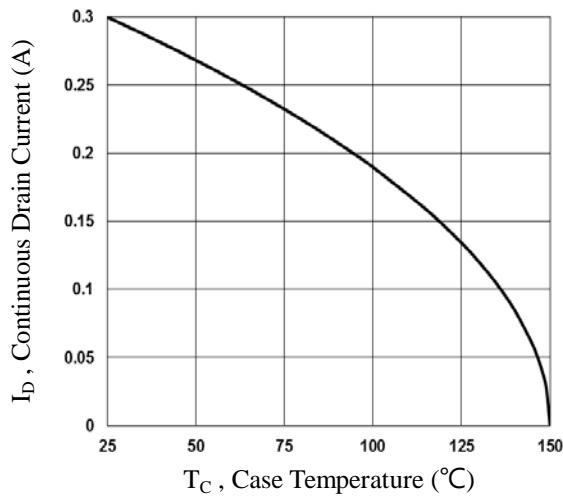
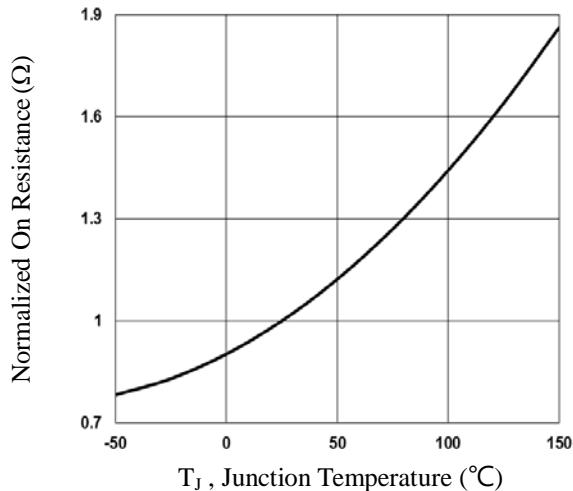
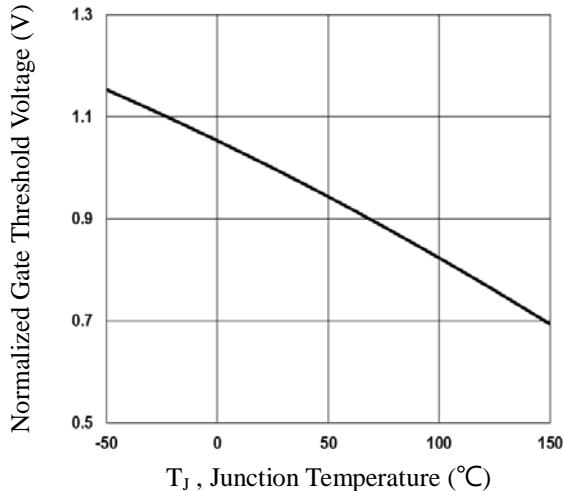
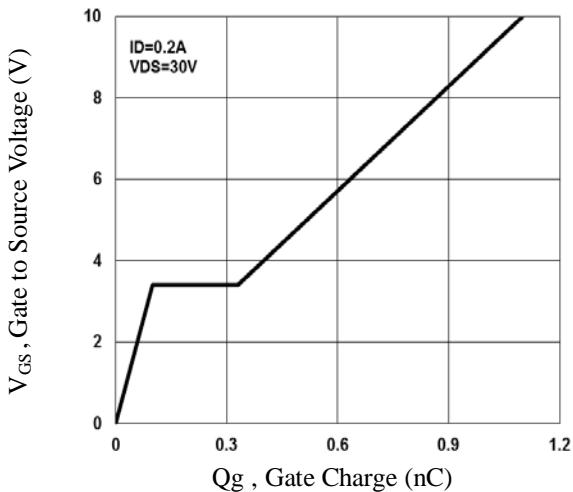
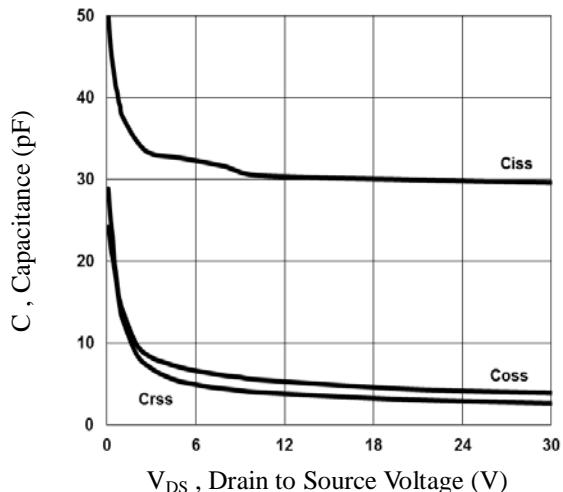
Q_g	Total Gate Charge ^{2,3}	$V_{\text{DS}}=30\text{V}$, $V_{\text{GS}}=10\text{V}$, $I_D=0.2\text{A}$	---	1.1	2	nC
Q_{gs}	Gate-Source Charge ^{2,3}		---	0.1	0.2	
Q_{gd}	Gate-Drain Charge ^{2,3}		---	0.23	0.5	
$T_{\text{d(on)}}$	Turn-On Delay Time ^{2,3}	$V_{\text{DD}}=30\text{V}$, $V_{\text{GS}}=10\text{V}$, $R_G=6\Omega$ $I_D=0.2\text{A}$	---	3	6	ns
T_r	Rise Time ^{2,3}		---	5	10	
$T_{\text{d(off)}}$	Turn-Off Delay Time ^{2,3}		---	14	27	
T_f	Fall Time ^{2,3}		---	9	17	
C_{iss}	Input Capacitance	$V_{\text{DS}}=10\text{V}$, $V_{\text{GS}}=0\text{V}$, $F=1\text{MHz}$	---	30.6	45	pF
C_{oss}	Output Capacitance		---	5.5	10	
C_{rss}	Reverse Transfer Capacitance		---	4	8	

Drain-Source Diode Characteristics and Maximum Ratings

Symbol	Parameter	Conditions	Min.	Typ.	Max.	Unit
I_s	Continuous Source Current	$V_G=V_D=0\text{V}$, Force Current	---	---	0.3	A
	Pulsed Source Current		---	---	1.2	A
V_{SD}	Diode Forward Voltage	$V_{\text{GS}}=0\text{V}$, $I_s=1\text{A}$, $T_J=25^\circ\text{C}$	---	---	1	V
t_{rr}	Reverse Recovery Time ²	$V_{\text{GS}}=30\text{V}$, $I_s=1\text{A}$, $dI/dt=100\text{A}/\mu\text{s}$ $T_J=25^\circ\text{C}$	---	---	---	ns
	Reverse Recovery Charge ²		---	---	---	nC

Note :

1. Repetitive Rating : Pulsed width limited by maximum junction temperature.
2. $V_{\text{DD}}=25\text{V}$, $V_{\text{GS}}=10\text{V}$, $L=1\text{mH}$, $I_{\text{AS}}=7\text{A}$, $R_G=25\Omega$, Starting $T_J=25^\circ\text{C}$
3. The data tested by pulsed, pulse width $\leq 300\mu\text{s}$, duty cycle $\leq 2\%$.
4. Essentially independent of operating temperature.


Fig.1 Output Characteristics

Fig.2 Continuous Drain Current vs. T_C

Fig.3 Normalized $R_{DS(on)}$ vs. T_J

Fig.4 Normalized V_{th} vs. T_J

Fig.5 Gate Charge Waveform

Fig.6 Capacitance Characteristics

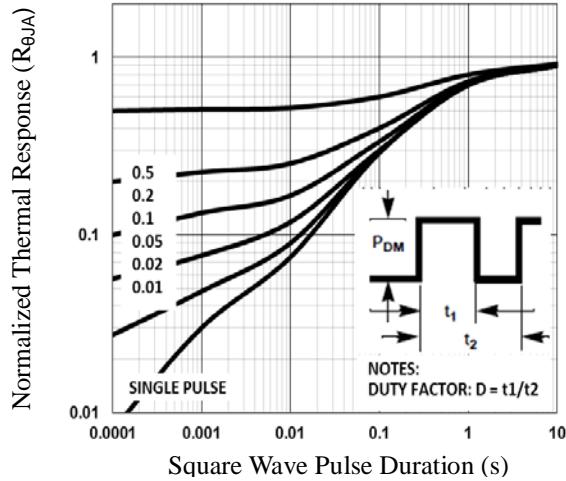


Fig.7 Normalized Transient Impedance

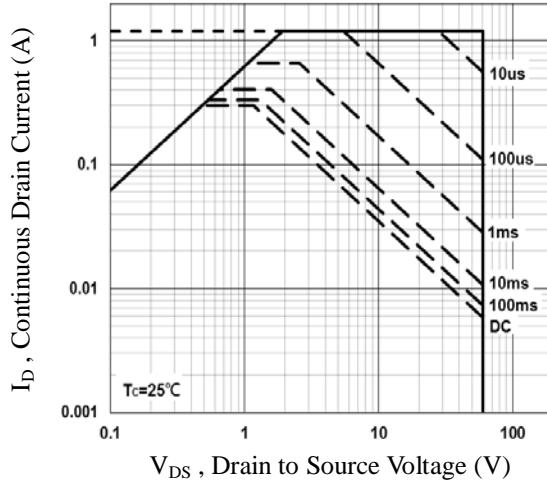


Fig.8 Maximum Safe Operation Area

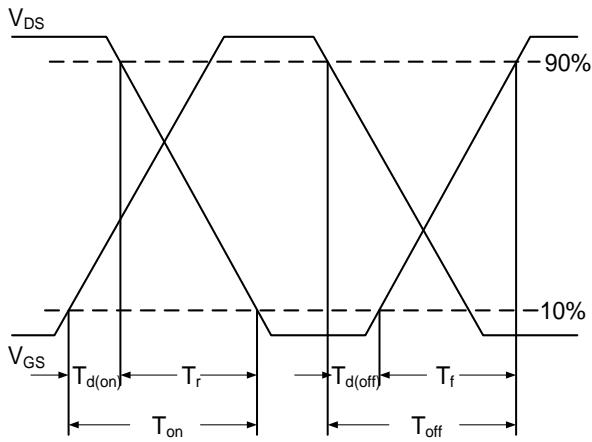


Fig.9 Switching Time Waveform

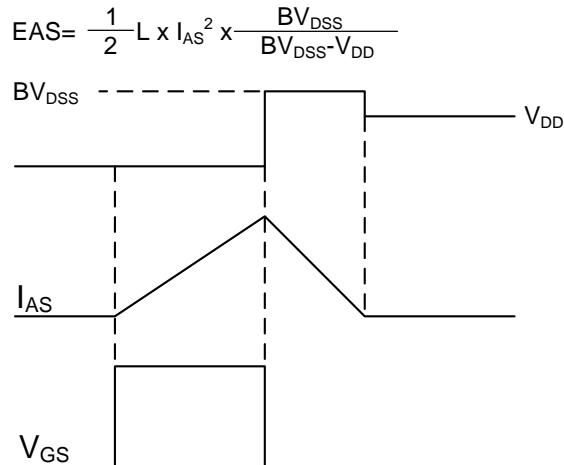
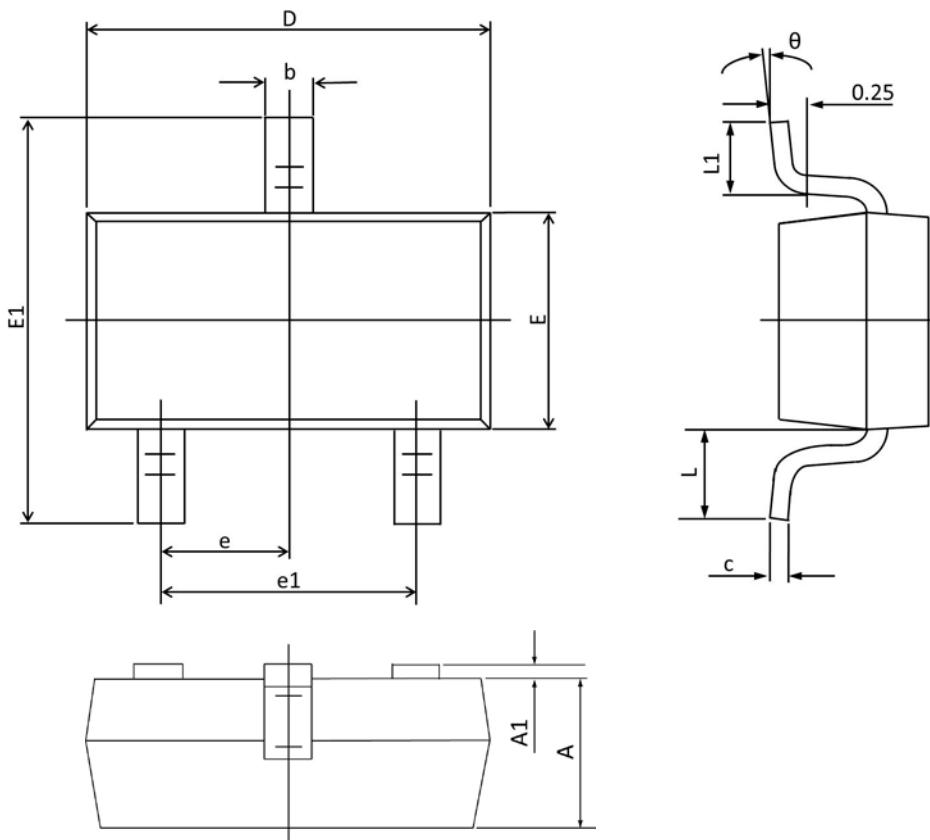


Fig.10 EAS Waveform

SOT23-3S PACKAGE INFORMATION



Symbol	Dimensions In Millimeters		Dimensions In Inches	
	Min	Max	Min	Max
A	0.900	1.000	0.035	0.039
A1	0.000	0.100	0.000	0.004
b	0.300	0.500	0.012	0.020
c	0.090	0.110	0.003	0.004
D	2.800	3.000	0.110	0.118
E	1.200	1.400	0.047	0.055
E1	2.250	2.550	0.089	0.100
e	0.950 TYP.		0.037 TYP.	
e1	1.800	2.000	0.071	0.079
L	0.550 REF.		0.022 REF.	
L1	0.300	0.500	0.012	0.020
θ	1°	7°	1°	7°