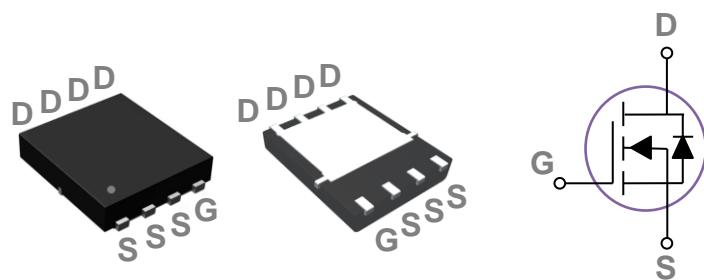


General Description

These N-Channel enhancement mode power field effect transistors are using trench DMOS technology. This advanced technology has been especially tailored to minimize on-state resistance, provide superior switching performance, and withstand high energy pulse in the avalanche and commutation mode. These devices are well suited for high efficiency fast switching applications.

PPAK5X6 Pin Configuration



BVDSS	RDS(ON)	ID
150V	65mΩ	15A

Features

- 150V, 15A, RDS(ON) = 65mΩ @ VGS = 10V
- VGS Guarantee $\pm 25V$
- Improved dv/dt capability
- Fast switching
- Green Device Available

Applications

- Motor Drive
- Power Tools
- LED Lighting

Absolute Maximum Ratings $T_c=25^\circ\text{C}$ unless otherwise noted

Symbol	Parameter	Rating	Units
V _{DS}	Drain-Source Voltage	150	V
V _{Gs}	Gate-Source Voltage	± 25	V
I _D	Drain Current – Continuous ($T_c=25^\circ\text{C}$)	15	A
	Drain Current – Continuous ($T_c=100^\circ\text{C}$)	9.5	A
I _{DM}	Drain Current – Pulsed ¹	60	A
EAS	Single Pulse Avalanche Energy ²	242	mJ
IAS	Single Pulse Avalanche Current ²	22	A
P _D	Power Dissipation ($T_c=25^\circ\text{C}$)	135	W
	Power Dissipation – Derate above 25°C	1.08	W/°C
T _{STG}	Storage Temperature Range	-55 to 150	°C
T _J	Operating Junction Temperature Range	-55 to 150	°C

Thermal Characteristics

Symbol	Parameter	Typ.	Max.	Unit
R _{θJA}	Thermal Resistance Junction to ambient	---	62	°C/W
R _{θJC}	Thermal Resistance Junction to Case	---	0.92	°C/W

Electrical Characteristics ($T_J=25^\circ\text{C}$, unless otherwise noted)
Off Characteristics

Symbol	Parameter	Conditions	Min.	Typ.	Max.	Unit
BV_{DSS}	Drain-Source Breakdown Voltage	$V_{\text{GS}}=0\text{V}$, $I_D=250\mu\text{A}$	150	---	---	V
$\Delta \text{BV}_{\text{DSS}}/\Delta T_J$	BV_{DSS} Temperature Coefficient	Reference to 25°C , $I_D=1\text{mA}$	---	0.08	---	$\text{V}/^\circ\text{C}$
$I_{\text{DS}}^{\text{SS}}$	Drain-Source Leakage Current	$V_{\text{DS}}=120\text{V}$, $V_{\text{GS}}=0\text{V}$, $T_J=25^\circ\text{C}$	---	---	1	μA
		$V_{\text{DS}}=96\text{V}$, $V_{\text{GS}}=0\text{V}$, $T_J=125^\circ\text{C}$	---	---	30	μA
I_{GSS}	Gate-Source Leakage Current	$V_{\text{GS}}=\pm 25\text{V}$, $V_{\text{DS}}=0\text{V}$	---	---	± 100	nA

On Characteristics

$R_{\text{DS(ON)}}$	Static Drain-Source On-Resistance ³	$V_{\text{GS}}=10\text{V}$, $I_D=6\text{A}$	---	52	65	$\text{m}\Omega$
		$V_{\text{GS}}=6\text{V}$, $I_D=4\text{A}$	---	65	90	$\text{m}\Omega$
$V_{\text{GS(th)}}$	Gate Threshold Voltage	$V_{\text{GS}}=V_{\text{DS}}$, $I_D = 250\mu\text{A}$	2	3	4	V
$\Delta V_{\text{GS(th)}}$	$V_{\text{GS(th)}}$ Temperature Coefficient		---	-2.5	---	$\text{mV}/^\circ\text{C}$

Dynamic and switching Characteristics

Q_g	Total Gate Charge ^{3, 4}	$V_{\text{DS}}=75\text{V}$, $V_{\text{GS}}=10\text{V}$, $I_D=4\text{A}$	---	30	45	nC
Q_{gs}	Gate-Source Charge ^{3, 4}		---	8.7	14	
Q_{gd}	Gate-Drain Charge ^{3, 4}		---	8	15	
$T_{\text{d(on)}}$	Turn-On Delay Time ^{3, 4}	$V_{\text{DD}}=30\text{V}$, $V_{\text{GS}}=10\text{V}$, $R_G=6\Omega$ $I_D=1\text{A}$	---	14.5	28	ns
T_r	Rise Time ^{3, 4}		---	19.2	18	
$T_{\text{d(off)}}$	Turn-Off Delay Time ^{3, 4}		---	33.6	60	
T_f	Fall Time ^{3, 4}		---	22.8	25	
C_{iss}	Input Capacitance	$V_{\text{DS}}=30\text{V}$, $V_{\text{GS}}=0\text{V}$, $F=1\text{MHz}$	---	1790	3000	pF
C_{oss}	Output Capacitance		---	160	300	
C_{rss}	Reverse Transfer Capacitance		---	82	160	
R_g	Gate Resistance	$V_{\text{GS}}=0\text{V}$, $V_{\text{DS}}=0\text{V}$, $F=1\text{MHz}$	---	1.4	2.8	Ω

Drain-Source Diode Characteristics and Maximum Ratings

Symbol	Parameter	Conditions	Min.	Typ.	Max.	Unit
I_s	Continuous Source Current	$V_G=V_D=0\text{V}$, Force Current	---	---	15	A
I_{SM}	Pulsed Source Current		---	---	30	A
V_{SD}	Diode Forward Voltage	$V_{\text{GS}}=0\text{V}$, $I_s=1\text{A}$, $T_J=25^\circ\text{C}$	---	---	1.2	V
t_{rr}	Reverse Recovery Time ²		---	---	---	ns
Q_{rr}	Reverse Recovery Charge ²	$T_J=25^\circ\text{C}$	---	---	---	nC

Note :

1. Repetitive Rating : Pulsed width limited by maximum junction temperature.
2. $V_{\text{DD}}=50\text{V}$, $V_{\text{GS}}=10\text{V}$, $L=1\text{mH}$, $I_{\text{AS}}=22\text{A}$, $R_G=25\Omega$, Starting $T_J=25^\circ\text{C}$.
3. The data tested by pulsed, pulse width $\leq 300\mu\text{s}$, duty cycle $\leq 2\%$.
4. Essentially independent of operating temperature.

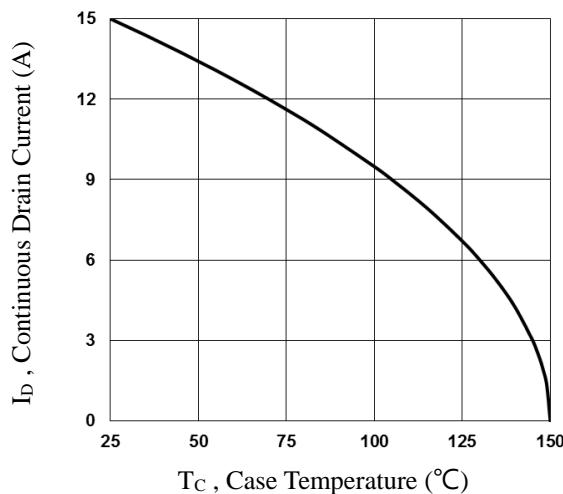
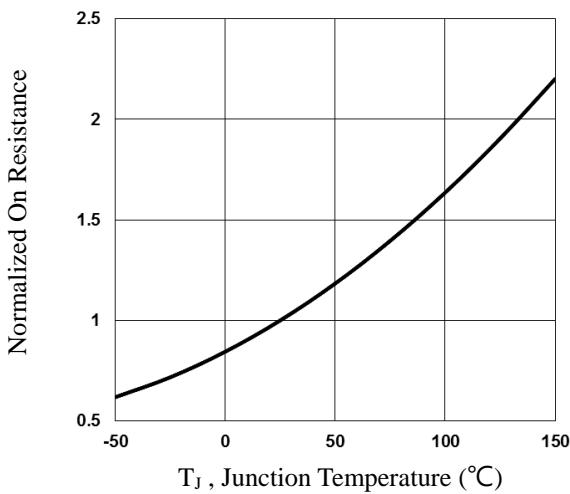
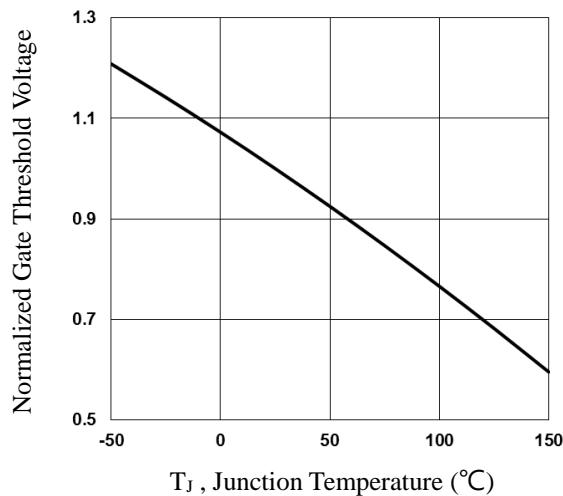
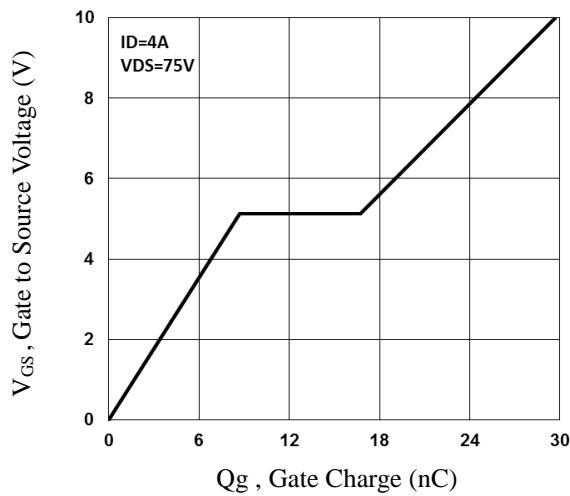
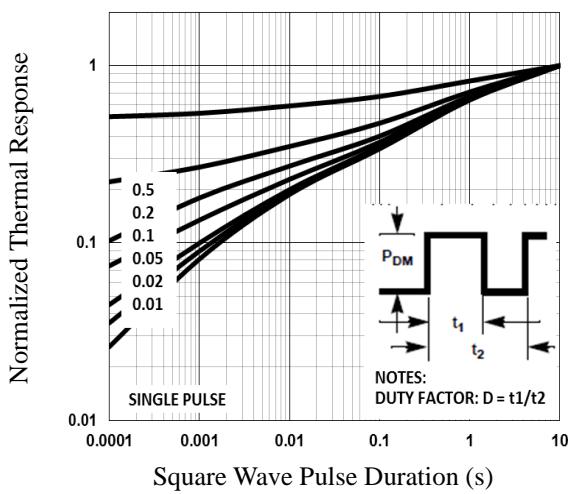
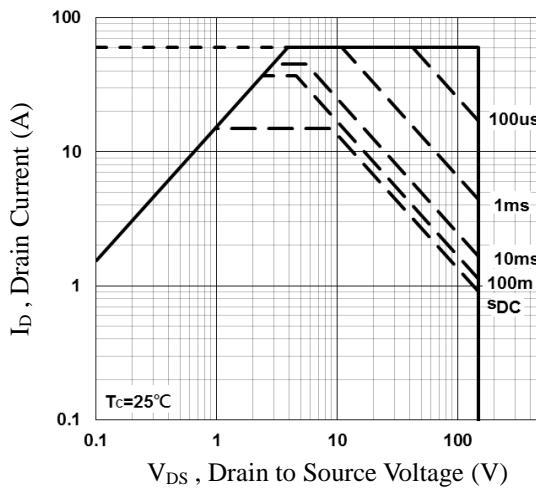
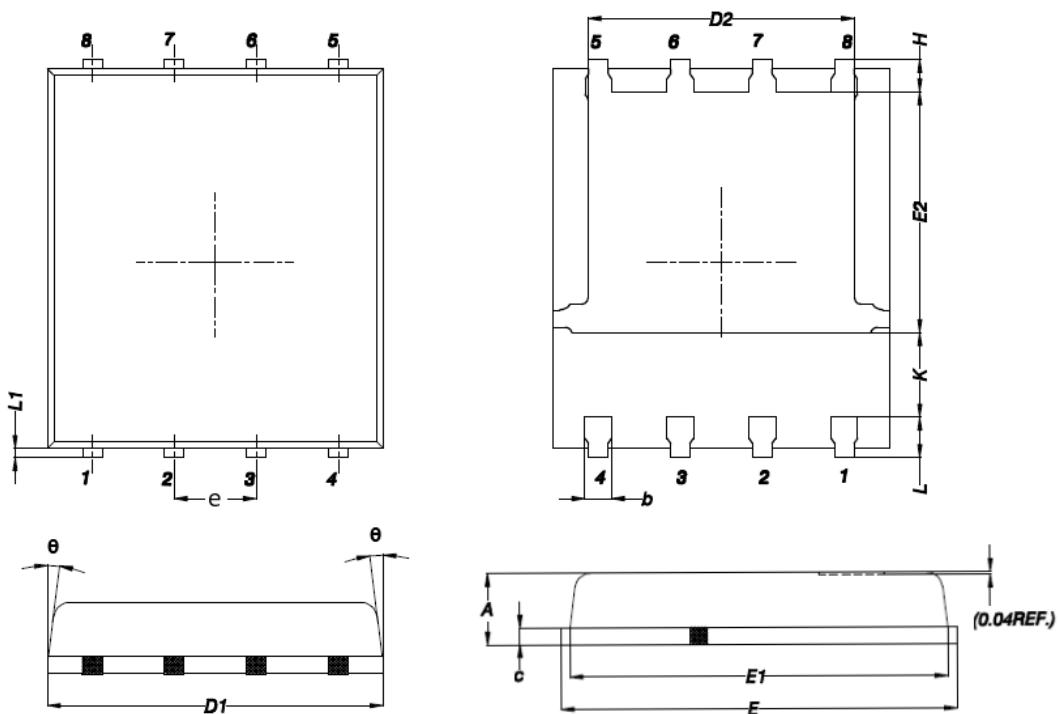

Fig.1 Continuous Drain Current vs. Tc

Fig.2 Normalized RDSON vs. Tj

Fig.3 Normalized Vth vs. Tj

Fig.4 Gate Charge Characteristics

Fig.5 Normalized Transient Impedance

Fig.6 Maximum Safe Operation Area


Fig.7 Switching Time Waveform

Fig.8 Gate Charge Waveform

PPAK5x6 PACKAGE INFORMATION



Symbol	Dimensions In Millimeters		Dimensions In Inches	
	MAX	MIN	MAX	MIN
A	1.200	0.850	0.047	0.031
b	0.510	0.300	0.020	0.012
C	0.300	0.200	0.012	0.008
D1	5.400	4.800	0.212	0.189
D2	4.310	3.610	0.170	0.142
E	6.300	5.850	0.248	0.230
E1	5.960	5.450	0.235	0.215
E2	3.920	3.300	0.154	0.130
e	1.27BSC		0.05BSC	
H	0.650	0.380	0.026	0.015
K	---	1.100	---	0.043
L	0.710	0.380	0.028	0.015
L1	0.250	0.050	0.009	0.002
θ	12°	0°	12°	0°